Introduction / Applications









An ideal solution for design engineers who are obligated to cut manufacturing costs and complexity out of their circuit board systems.

These enhanced end launch connectors properly align and hold the center contact of a coaxial connector to the circuit board plane without the need for special fixtures. This is done with specially-designed connector legs that tightly grip a range of substrate thicknesses until the soldering operation to couple the two is complete. Additionally, these connectors feature redesigned contacts and insulator material that work in tangent to form an optimized connection point. While the contact maintains proper impedance under aggressive torque and axial stresses, the insulator acts as a seal by compressing itself into the board edge during soldering. This creates a barrier between the inner and outer conductors and protects against solder bridging.

No mounting screws. No adapters. No more aftermarket tools or ad hoc devices on your assembly lines. These unique connectors will overcome the problematic gaps and discontinuities associated with inconsistent soldering process. These connectors can save your products from the poor connections that degrade signal quality and provide optimal Return Loss values between 0-18 GHz.

For those microwave engineers who are required to transition microwave energy from coaxial to planar transmission line structures on even higher frequency board substrates, Emerson Connectivity Solutions recommends the Johnson line of High Frequency End Launch, Self-Affixing connectors which can operate up to 26.5GHz with good Return Loss values. For more information on these connectors, contact customer service.

The High Frequency End Launch connectors, works in a similar fashion to the self-fixturing connectors by attaching directly to coplanar waveguide circuit board and operates with respectable Return Loss values up to 26.5 GHz. The in-line connector design minimizes reflections as compared to a right-angle (perpendicular) PC mount transition.

Applications for these connectors include:

- Automated Test Equipment
- Broadband MMIC Power Amplifiers
- Cellular Linear Power Amplifiers
- DBS Low-Noise Block Down Convertors
- Global Positioning Satellite Antennas
- GPS and Phased Array Antennas
- High Speed Routers and Switches
- Microwave Filters, Mixers and Combiners
- Phased Array Antennas
- Radar Systems
- Remote Sensing and Metering
- RFID (Radio Frequency Identification) Tags
- Wireless Antennas



Emerson Network Power Connectivity Solutions

US Headquarters 3000 Lakeside Drive, Ste. 308N Bannockburn, IL 60015, USA

North America

299 Johnson Avenue, Ste. 100 Waseca, MN 56093, USA Toll Free: 800.247.8256 Tel: 507.833.8822 Fax: 507.833.6287 ECSorders@Emerson.com

Europe, Middle East, Africa

Emerson Network Power Connectivity Solutions, Ltd. 11 Bilton Road Chelmsford Essex CM1 2UP England Tel: +44 1245.359.515 Fax: +44 1245.358.938 EMEAConnectivitySales@Emerson.com

Asia Pacific

Emerson Network Power Connectivity Solutions (Shanghai) Co., Ltd. Building 1, No. 800 ShenFu Road XinZhuang Industry Park Shanghai, China 201108 Tel: +86 21.5442.7668 Fax: +86 21.5442.7628 APConnectivitySales@Emerson.com

Emerson Network Power The global leader in enabling business-critical continuity.

AC Power Systems Embedded Power Inbound Power Connectivity DC Power Systems Integrated Cabinet

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2013 Emerson Electric Co. Rev. 1/13

SELF-FIXTURE END LAUNCH CONNECTORS

For more information, please call customer service... (507) 833-8822



Connectivity Solutions

About Emerson Network Power Connectivity Solutions

Emerson Network Power Connectivity Solutions, an Emerson business, serves the needs of wireless communications, military, telephony and data networks, CATV security systems, health care and industrial facilities with a full spectrum of RF/microwave and fiber optic connectivity products. For more information, visit www.EmersonConnectivity.com

About Emerson


Emerson (NYSE: EMR), based in St. Louis, Missouri (USA), is a global leader in bringing technology and engineering together to provide innovative solutions for customers in industrial, commercial, and consumer markets around the world. The company is comprised of five business segments: Process Management, Industrial Automation, Network Power, Climate Technologies, and Commercial & Residential Solutions. For more information, visit www.Emerson.com



www.EmersonConnectivity.com www.EmersonNetworkPower.com/Connectivity

- Outside Plant Precision Cooling Site Monitoring and Services

SMA Self-Fixture End Launch Connectors









Jonnson Connectivity Solutions

101010101010101010101



Specifications

Electrical Ratings

Impedance: 50 Ohms 0-18 GHz (26.5 GHz for High Frequency Model) Frequency Range: VSWR: Dependent upon application 335 @ Sea Level, 85 @ 70K Feet Working Voltage: (VRMS max): Dielectric Withstanding Voltage: (VRMS min at sea level): 1000 Insulation Resistance: 5000 megohms min **Contact Resistanc**e: (milliohms max): 3.0 Initial, 4.0 after environmental **Corona Level:** (Volts min at 70,000 feet): 250 **RF High Potential Withstanding Voltage**: (VRMS min tested at 4 and 7 MHz): 670

Mechanical Ratings

Engagement Design: MIL-PRF-39012, Series SMA Engagement/Disengagement Force: 2 lb-in max Mating Torque: 7 to 10 lb-in **Coupling Proof Torque:** 15 lb-in min **Coupling Nut Retention**: 60 lbs min **Contact Retention Force**: 6 lbs min axial force, 4 oz-in min torque Durability: 500 cycles min

Environmental Specifications

(Meets or Exceeds the Applicable Paragraph of MIL-PRF-39012)

Temperature Range: Thermal Shock:	-65° to + 165° C MIL-STD-202, Method 107, Condition B
Corrosion:	MIL-STD-202, Method 101, Condition B
Shock:	MIL-STD-303, Method 213, Condition I
Vibration:	MIL-STD-202, Method 204, Condition D
Moisture Resistance:	MIL-STD-202, Method 106

Material Specifications


Bodies:	Brass per ASTM B16, gold plated* per MIL-DTL-45204 .00001" min.
	or nickel plated per SAE-AMS-QQ-N-290
Contacts:	Male - brass per ASTM B16, gold plated per MIL-DTL-45204 .00003" min.
	Female - beryllium copper per ASTM B196, gold plated per MIL-DTL-45204 .00003" min.
Nut Retention Spring:	Beryllium copper per ASTM B196. Unplated
Insulators:	PTFE fluorocarbon per ASTM 4894 and ASTM 4895
Mounting Hardware:	Brass per ASTM B16 or SAE-AMS-QQ-N-290, gold plated per MIL-DTL-45204 .00001" min. or nickel plated per SAE-AMS-QQ-N-290

 st All gold plated parts include a .00005" min. nickel underplate barrier layer

Jack Assembly Design

Gold Plated, Round Contact






Part No.	Frequency	Board Thickness
142-0791-801	0-18 GHz	.062(1.57)

Gold Plated, Tab Contact





Part No.	Freq. Range	Board Thickness	"A"
142-0791-811	0-18 GHz	.042(l.07)	.048(l.22)
142-0791-821	0-18 GHz	.062(l.57)	.068(l.73)

Gold Plated, Round Contact – High Frequency






Part No.	Frequency	Board Thickness	"A"	"B
142-1701-821	0-26.5 GHz	.062 (1.57)	.068	.05
142-1701-831	0-26.5 GHz	.059 (1.49)	.063	.05













The tabluated dimensions "A", "B", "C", "D", and "E" were determined experimentally to achieve low VSWR (typically less than 1.5 up to 18 GHz). The circuit board uses connectors for these tests that are double-sided FR4 with 1 oz. copper on both sides. The copper was left on the bottom of the board to create a ground plane for the 50 Ohm microstrip structure. While not all inclusive, these dimensions are given as reference information for selected SMA End Launch connectors. Further adjustments may be necessary depending upon the application. All dimensions are in inches (millimeters).


Part No.	Base Width	Board Thickness	"A"	"В"	"C"	"D"	"Е"
142-0791-801	.375	.062 (l.57)	.073	.073	.250	.440	.200
142-0791-811	.375	.042 (l.07)	.103	.103	.250	.440	.200
142-0791-821	.375	.062 (l.57)	.083	.083	.250	.440	.200
142-1701-821	.375	.062 (l.57)	See Figure 2 below for attachment dimensions				
142-1701-831	.375	.059 (1.50)	See Figure 2 below for attachment dimensions				



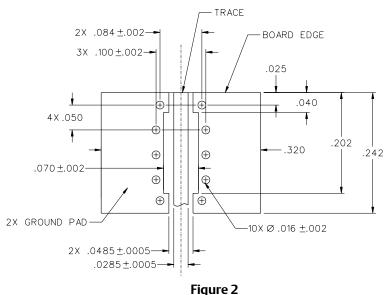


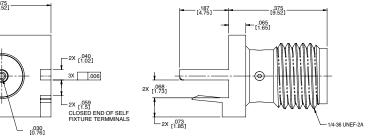


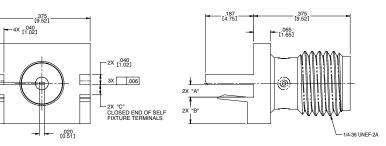











For more information, please contact customer service... (507) 833-8822 or (800) 247-8256 Board thickness is demonstrated in inches (millimeters).

0	
S S	
은 오	
±. –	

MA SELF-FIXTURE END LAUNCH CONNECTORS