


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

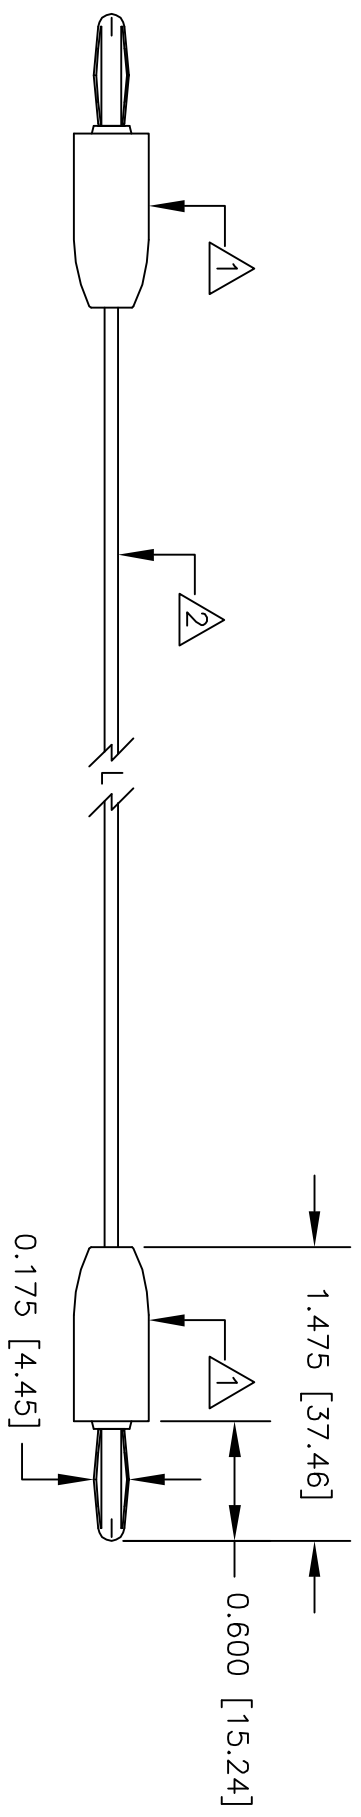

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
	.XXX ±		APPROVALS	DATE	STD BANANA PLUG (9202)
			DRAWN	R.L.	10/10
			APPROVED BY		JUMPER
MATERIAL SEE NOTE.		FINISH		SIZE CODE IDENT NO. DRAWING NO.	
SEE NOTE.		SEE NOTE.		A 08505 9105	
APPLICATION USED ON		DO NOT SCALE DRAWING		SCALE 1:1	
				SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.